

DS-UPS600-X UPS



- Wide input voltage range
- Built-in AVR
- Super fast charging
- Overload and short circuit protection
- Compact design






▪ Specification

Parameters	
Protection Method	Overload, discharge, and overcharge protection
Operating Temperature and Humidity	0 °C to 40 °C (32 °F to 104 °F). Humidity 30% to 90% (non-condensing)
Weight	Approx. 4.2 kg (9.26 lb)
Dimension	274 mm × 95 mm × 139 mm (10.79" × 3.74" × 5.47")
LED Indicator	Working Mode (AC Mode): Solid green Charging Mode (DC Mode): Solid red Overloading Mode: Flashing yellow
Alarm	Charging Mode (DC mode): Sounding every 8 seconds Low Battery: Sounding every second Overloading Mode: Sounding every 0.5 seconds Fault: Continuously sounding
Storage Conditions	-10 °C to 50 °C (14 °F to 122 °F). Humidity 20% to 95% (non-condensing)
Capacity	600 VA / 360 W
Input Voltage Range	140 VAC to 290 VAC
Input Frequency Range	50/60 Hz
Output Voltage	210 VAC to 235 VAC
Frequency Range	50/60 Hz ± 0.5 Hz
Transfer Time	≤ 10ms
Waveform	Charging Mode (DC Mode): PWM
POWER	
Battery	12 V/7 Ah × 1
Rechargeable	4-6 hours recover to 90% capacity

▪ Available Model

DS-UPS600-x

▪ Dimension

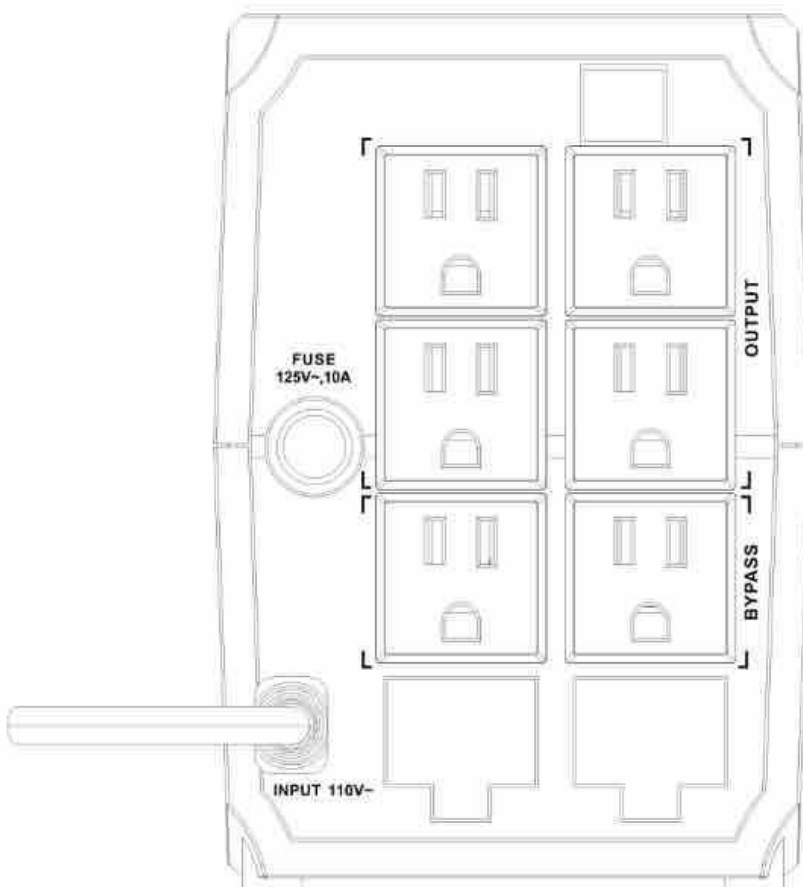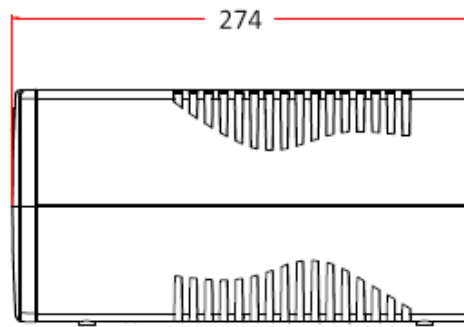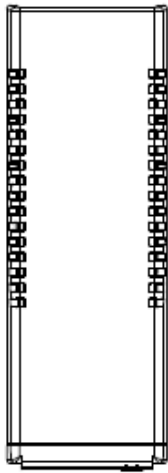

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

